Grohtherm

34 125 3/4" Thermostatic Rough-In Valve

Description

Paraffin cartridge
Non-rising handle spindle
3/4" NPT female connections
Built-in check valves
Service stops
Temperature control only
GROHE TurboStat® Technology
Separate volume control required
Requires Twin Ell for shower/tub combinations with diverter tub spout

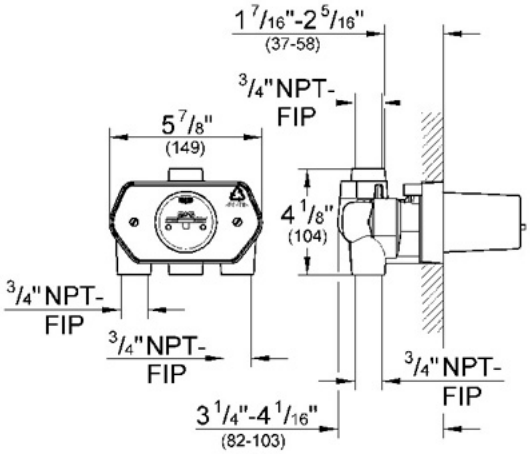

Flow Rate

18 gpm at 45 psi

Code Compliance

ASME/ANSI A112.18.1M
ASSE Standard 1016

Finish Options

34 125 OOO Rough-In

GROHE America, Inc 241 Covington Drive, Bloomingdale, IL 60108 630-582-7711 Fax:630-582-7722
GROHE Canada, Inc 1226 Lakeshore Road East, Mississauga, Ontario Canada L5E 1E9 905.271.2929 Fax:905.271.9494